



eloflex

Functionality to meet many requirements

Specifications – eloflex

Total weight:	85 kg
Lying surface dimensions:	90 x 200 cm
External dimensions:	103 x 214 cm
Safe capacity:	170 kg
Maximum person weight:	135 kg
Height adjustment:	39,5–80 cm
Lifter space:	23 cm
Side rail height:	37 cm with wooden slats 34 cm with ripolux®
Special dimensions:	180–220 cm length, Special width not possible



Motors

Water-resistant to IPX4, high quality spiral cable with pull relief and anti-kink device as well as safety in power plug, mains isolation system and emergency lowering.

Feature options

Item no. 4-section


260	wooden side rails
260	steel side rails

Subject to technical modification.



4-section

Electric back and leg section adjustment with automatic triple action knee break.



Lowered head/leg position (Trendelenburg) on request.

Basic equipment:


Lifting pole with triangle grip
Integrated wooden-, steel side rails
Transport and storage system
Wooden sprung slats

Extras:

Raised leg position 90°
Raised leg position stretched
Bed lamp model D
Bed lamp model E
Bed extension for length of 220 cm
Wooden sprung slats with degree of tension
freeplus²⁴ 24 V power plug
Infusion holder for lifting pole
Mattresses
Mattress compensation
Mattress extension for a length of 220 cm
Integrated head rest for 5-section lying surface
Bumpers for side rail attachment
Bumpers for side rails
ripolux[®]-lying surface
ripoplan-lying surface
Side rail attachment
Special length
Steel lying surface
Combi-lying surface without spiroplex/with spiroplex spring technology
Hand control for Trendelenburg
Universal clamp with modular equipment
Inside full covered end panels

Safety guarantees:

- Mains isolation system
- Primary fuse in the power plug
- Secondary fuse/polyswitch
- Thermal release
- Disabling function
- Hand control with single faulty safety
- Special spiral mains cable
- Pull relief at power plug and anti-kink device
- Water-resistant to IPX4
- Distortion-free, highly stable side rails

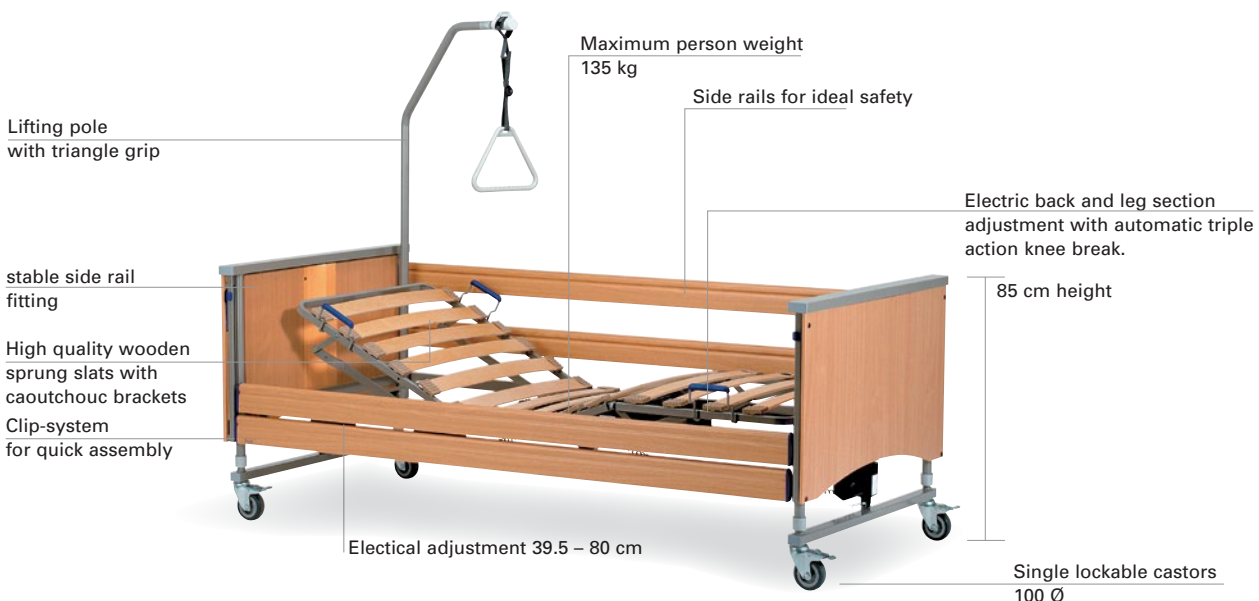



eloflex 185

The low-cost variant for middle-heavy weights up to 185 kg

Specifications – eloflex 185

Total weight:	93 kg
Lying surface dimensions:	90 x 200 cm
External dimensions:	103 x 214 cm
Safe capacity:	220 kg
Maximum person weight:	185 kg
Height adjustment:	39,5–80 cm
Lifter space:	23 cm
Side rail height:	37 cm with wooden slats 34 cm with ripolux®
Special dimensions:	Special width 100 cm, 180–220 cm length, Inside full covered end panels only possible in 90 cm width!

Motors

Water-resistant to IPX4, high quality spiral cable with pull relief and anti-kink device as well as safety in power plug, mains isolation system and emergency lowering.

Feature options

Item no. 4-section	
260	wooden side rails
260	steel side rails

Subject to technical modification.



4-section

Electric back and leg section adjustment with automatic triple action knee break.

