



# eloflex 185

The low-cost variant for middle-heavy weights up to 185 kg

## Specifications – eloflex 185

Total weight:	93 kg
Lying surface dimensions:	90 x 200 cm
External dimensions:	103 x 214 cm
Safe capacity:	220 kg
Maximum person weight:	185 kg
Height adjustment:	39,5–80 cm
Lifter space:	23 cm
Side rail height:	37 cm with wooden slats 34 cm with ripolux®
Special dimensions:	Special width 100 cm, 180–220 cm length, Inside full covered end panels only possible in 90 cm width!

## Motors

Water-resistant to IPX4, high quality spiral cable with pull relief and anti-kink device as well as safety in power plug, mains isolation system and emergency lowering.

## Feature options

<b>Item no.</b> 4-section	
260	wooden side rails
260	steel side rails

Subject to technical modification.



### 4-section

Electric back and leg section adjustment with automatic triple action knee break.



### Basic equipment:



Lifting pole with triangle grip  
Integrated wooden-, steel side rails  
Transport and storage system  
Wooden sprung slats

### Extras:

Raised leg position 90°  
Raised leg position stretched  
Bed lamp model D  
Bed lamp model E  
Bed extension for length of 220 cm  
Wooden sprung slats with degree of tension  
freeplus<sup>24</sup> 24 V power plug  
Infusion holder for lifting pole  
Mattresses  
Mattress extension for a length of 220 cm  
Bumpers for side rail attachment  
Bumpers for side rails  
rioplan-lying surface (only for a width of 90 cm)  
Side rail attachment  
Special length/width  
Steel lying surface  
Combi-lying surface without spiroplex/with spiroplex spring technology  
Universal clamp with modular equipment  
Inside full covered end panels (only for a width of 90 cm)

### Safety guarantees:

- Mains isolation system
- Primary fuse in the power plug
- Secondary fuse/polyswitch
- Thermal release
- Disabling function
- Hand control with single faulty safety
- Special spiral mains cable
- Pull relief at power plug and anti-kink device
- Water-resistant to IPX4
- Distortion-free, highly stable side rails

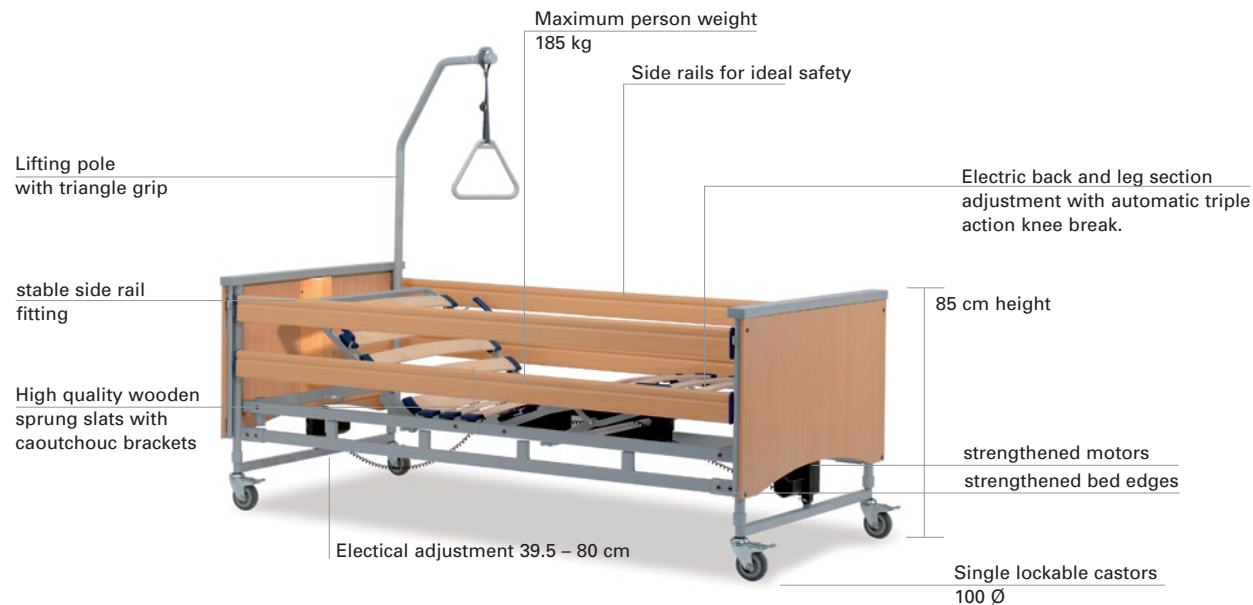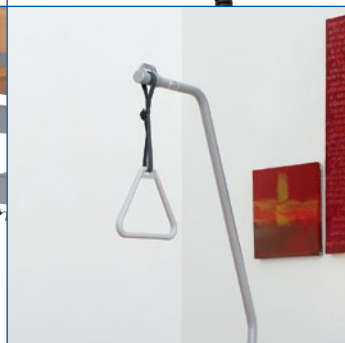



# belluno

A modern classic for proper rest

## Specifications – belluno

Total weight:	98 kg
Lying surface dimensions:	90 x 200 cm
External dimensions:	103 x 213 cm
Safe capacity:	170 kg
Maximum person weight:	135 kg
Height adjustment:	37–83 cm
	32–78 cm lie low version
Lifter space:	15 cm, 10 cm lie low version
Side rail height:	37 cm with wooden slats
	34 cm with ripolux®
Special dimensions:	80–140 cm width,
	180–220 cm length

## Motors

Water-resistant to IPX4, high quality spiral cable with pull relief and anti-kink device as well as safety in power plug, mains isolation system and emergency lowering.

## Feature options

Item no.	
280	wooden side rails
280	steel side rails

Subject to technical modification.



### 4-section

Electric back and leg section adjustment with automatic triple action knee break.

