



Side rail model
short splitted



livorno lie low

The versatile lie low bed

Due to the enrichment of the product family the use of the livorno is now even more versatile. As a lie low model the livorno offers a wide height adjustment of 28.5 cm in its lowest position up to 72.5 cm. Thereby the livorno remains movable in every position because of its castors and the central brake it is easy and comfortable to fix. Livorno can be provided with continuous side rails or splitted ones. The wooden parts are identical to the standard models and if necessary they can be exchanged. Therefore, a standard model can be changed into a lie low model without losing its accustomed looks.

Specifications – livorno lie low


Total weight:	109 kg
External dimension:	105 x 212 cm
Safe capacity::	200 kg
Maximum person weight::	165 kg
Height adjustment:	28,5 – 72,5 cm
Lifter space:	minimum. 13,5 cm on a width of 64 cm
Side rail height:	39 cm with wooden slats 34 cm with ripolux®
Dimension of lying surface:	90 x 200 cm
Special sizes:	80 – 140 cm width, 180 – 220 cm length

Motors	Water-resistant to IPX4, high-grade anti-kink , pull relief and anti-kink protection, fuse in the mains plug and emergency lowering device.
---------------	---------------------------------------------------------------------------------------------------------------------------------------------

Variations of equipment

End panels	Typ I / II / III / V / VI / VII / VIII
Side rails	continous wooden side rails splitted wooden side rails

Subject to technical modification.

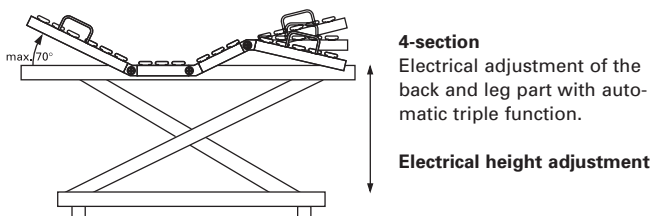

Extras:

You can find descriptions of the accessories on page 46 – 47.

Roll-down mattress for lie low bed	◦
Lifting pole with triangle grip	◦
Grab rail	◦
Raised leg position 90°	◦
Raised leg position stretched	◦
Bed lamp model D	◦
Bed lamp model E	◦
Bed extension for the length of 220 cm	◦
Wooden slats with degree of tension	•
Deposit for the bed clothes	◦
Infusion holder for lifting pole	◦
Infusion holder double (fixed)	◦
Infusion holder quadruple (telescopic)	◦
Integrated wooden side rails	•
Mattresses	◦
Mattress compensation	◦
Mattress extension for a length of 220 cm	◦
Mechanical bed version	◦
Integrated head rest for 5-section lying surface	◦
Low entrance height	◦
Bumpers for side rail attachment	◦
Bumpers for side rails	◦
ripolux®- lying surface	◦
rioplan- lying surface	◦
Covering panel of the lying surface frame	•
Side rail attachment	◦
Side rails in special height *	◦
Long splitted side rails	◦
Short splitted side rails	◦
Special width/length	◦
Control box and hand control for Trendelenburg	◦
Individual disabling function	◦
Special mattresses	◦
Steel lying surface	◦
Transport and storage system	◦
Universal clamp with modular accessories	◦
Lower leg part with manual adjustment (raster)	◦
Wall protection roll (vertical/horizontal)	◦
Wall protection roll (gummed)	◦
Wall protection buffer head part/ lateral	◦
Central braking	•

• Standard ◦ Extras

* not possible with splitted side rails

Safety guarantees

- Mains isolation system
- Primary fuse in the power plug
- Secondary fuse/polyswitch
- Thermal release
- Disabling function
- Hand control with single fault safety
- Special spiral mains cable
- Pull relief at the mains cable with anti-kink protection
- Water-resistant to IPX4
- Distortion-free, highly stable side rails

