



## practico lie low

The optimum of  
quality of life and care

The practico lie low is the all-round talent among the nursing care beds. Due to its wide height adjustment range it complies with requirements on secure bedding in its lowest position and a comfortable care height.

The cosy wooden covering, the extensive variation of the lying surface and side rails grant an unrestricted comfort of living and care. The standard central braking of all four castors can be operated in every height. Besides its low entrance height the practico offers enough space for a lifter. The wide range of end panels and interesting colour combinations fulfill all requirements.



Model with open castors



practico lie low with moving along side rails at the head end

## Specifications – practico lie low



Total weight:	140 kg
External dimension:	105 x 210 cm
	98,5 x 210 cm by moving along side rails
Safe capacity::	220 kg
Maximum person weight::	185 kg
Height adjustment:	29 – 78 cm
Lifter space:	15 cm
Side rail height:	39 cm with wooden slats
	34 cm with ripolux®
Dimension of lying surface:	90 x 200 cm
Special sizes:	200 – 220 cm length

<b>Motors</b>	Water-resistant to IPX4, high-grade anti-kink , pull relief and anti-kink protection, fuse in the mains plug and emergency lowering device.
---------------	---

### Variations of equipment

End panels	Typ I / II / III / V / VI / VII / VIII
Side rails	continuous wooden side rails splitted wooden side rails

Subject to technical modification.

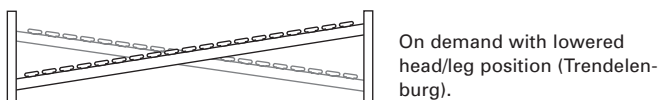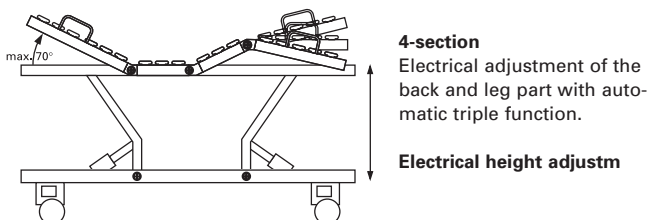

## Extras:

You can find descriptions of the accessories on page 46 – 47.

Roll-down mattress for lie low bed	◦
Lifting pole with triangle grip	◦
Grab rail	◦
Raised leg position 90°	◦
Raised leg position stretched	◦
Bed lamp model D	◦
Bed lamp model E	◦
Bed extension for the length of 220 cm	◦
Wooden slats with degree of tension	•
Deposit for the bed clothes	◦
Infusion holder for lifting pole	◦
Infusion holder double (fixed)	◦
Infusion holder quadruple (telescopic)	◦
Integrated wooden side rails	•
Mattresses	◦
Mattress compensation	◦
Mattress extension for a length of 220 cm	◦
Mechanical bed version	
Integrated head rest for 5-section lying surface	◦
Low entrance height	◦
Bumpers for side rail attachment	◦
Bumpers for side rails	◦
ripolux®- lying surface	◦
rioplan- lying surface	◦
Covering panel of the lying surface frame	•
Side rail attachment	◦
Side rails in special height *	◦
Long splitted side rails	◦
Short splitted side rails	◦
Special width/length	◦
Control box and hand control for Trendelenburg	◦
Individual disabling function	◦
Special mattresses	◦
Steel lying surface	◦
Transport and storage system	◦
Universal clamp with modular accessories	◦
Lower leg part with manual adjustment (raster)	◦
Wall protection roll (vertical/horizontal)	◦
Wall protection roll (gummed)	◦
Wall protection buffer head part/ lateral	◦
Central braking	•

• Standard ◦ Extras

\* not possible with splitted side rails

## Safety guarantees

- Mains isolation system
- Primary fuse in the power plug
- Secondary fuse/polyswitch
- Thermal release
- Disabling function
- Hand control with single fault safety
- Special spiral mains cable
- Pull relief at the mains cable with anti-kink protection
- Water-resistant to IPX4
- Distortion-free, highly stable side rails